

## DPAY

### POWER SUPPLY




Fields of application	· Power supply for small loads.
Indicator leds	Presence of voltage: Green
Output voltage	24 VDC
Output current	50mA

Reference	HOUSING	FUNCTION	OUTPUT		VOLTAGE
	D DIN rail	P A Power supply	Y	24VDC	
					024 24 VAC 048 48 VAC 110 110..125 VAC 230 220..230 VAC 400 380..415 VAC

To compose a reference, select an option from each of the columns. Example: DPAY 230

Supply voltage	AC	
	DPAY	
	AC	
	L	
	A1	
	A2	
	N	
Isolation galvanic	Yes	
Frequency	50 / 60 Hz	
Operating margins	±10% -15%	
Consumption	3,2 VA	

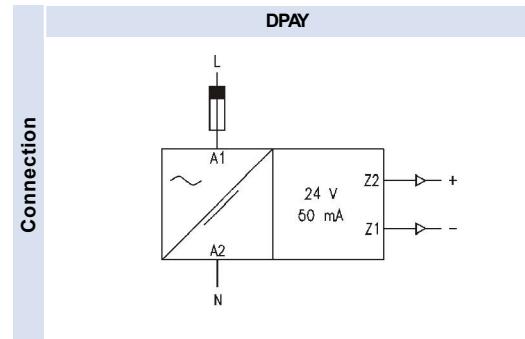

Construction data and environmental	DPAY	
	Voltage phase-neutral	300 V
Overvoltage category		III
Surge voltage		4 kV
Degree of pollution		3
Protection class		IP 20
Approximate weight		280 g
Temperature storage		-50..+85°C
Operating temperature		-20..+50°C
Humidity		30..85% HR
Housing		Cyclooy - Light grey
Base		-
Led display		Lexan - Transparent
Buttons, pins and flange		Technyl - Dark blue
Based terminals		-
Terminal		Brass
Norms	Designed and manufactured under CEE regulations. Compatibility electromagnetic directives 89/366/CEE and 92/31/CEE. Electrical safety, directive 73/23/EEC. Plastics: UL 91 V0	

