


## IMN OP-EL PVC

### LEVEL SENSOR OPTICAL / ELECTRICAL CONTROL

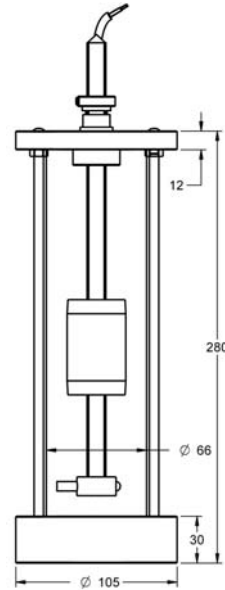

Process connection	By female thread 3/4" G.
Closed flange	Aluminium
Glass	Ø 66 mm. Pyrex
Electrical connection	Cable silicon / PVC
Nº contacts	1..3
Type of contact	NO:80 WVA / 250 VAC-2A · NO-NO/NC:60 WVA / 250 VAC-2A
Temperature	-10..+60°C
Pressure	3 kg/cm <sup>2</sup>
Density	0,65 g/cm <sup>3</sup>
Float	Standard: type FCPP04M14, Ø 29x50 mm. PP (See table 1).
Length	100..2000 mm.
Protection	Standard: IP 65. (Others options selon table 2).

Table 1: Floats

Type	FCPP04M14	FCPP05M18
Dimensions (mm)	Ø 29x50	Ø 38x60
Pressure (kg/cm <sup>2</sup> )	3	3
Density (g/cm <sup>3</sup> )	e > 0,6	e > 0,5
Figure		

Table 2: Cables

Standard	Normal construction, without any internal filling.
Protected	Filled with anticondensation gel.
Insulated	Filled with epoxy resin, flexible.

Ordering code

**IMN OP-EL PVC - V**  **P**  **F**  **L**  **C**  **N**

Version	Standard	1
	Protected	2
	Insulated	3
Connect. process	3/4" G	05
Float	FCPP04M14	55
	FCPP05M18	57
Total length (LT)	(mm)	
Number of contacts	1-3	
Number of floats	1-2	

To compose the reference, choose one option of each cell.  
Example: **IMN OP-EL PVC V1 P05 F55 L500 C2 N1**