


INME ECO

FLOAT LEVEL SWITCH

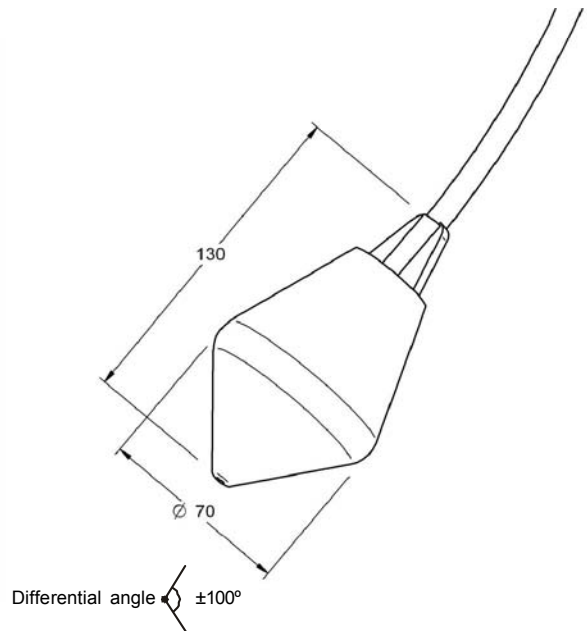

Funtion	Switch to control a maximum or minimum level in the process of filling or emptying of liquids. Omnidirectional.
Application	Economic, low cost. For clean water and liquids bit agitated.
Process connection	By cable
Differential action	±100°, 450 mm.
Adjustment	By counterweight placed along the cable. The counterweight is optional and must be requested specifically.
Body material	Polipropilenne copolymer (PP)
Cable	PVC, 3 x 0,75 mm ²
Cable lenght	5 m (Optional 10 - 15 and 20 m)
Contact type	SPDT micro-switch (AgNi)
Maximum voltage	250 VAC
Maximum current	16A / 250 VAC (resistive load) - 6A / 250 VAC (inductive load)
Pressure	3,5 bar
Operating temperature	+70 °C
Density	0,7..1,15 kg/dm ³
Dimensions	Ø70 x 130 mm
Weights	105 gr. (without cable) 60 gr. (cable) Counterweight (optional): 175 gr
Protection	IP68

Installation examples

